| REV | DATE | BY | DESCRIPTION |
|---|---|---|---|
| - | 22-7-2013 | AvD | REFERENCE DRAWING SECC240101 |
| A | 10-1-2017 | AvD | ITEM 5 (CONTROL UNIT A140022) CHANGED |
| B | 27-2-2019 | CR | WARNING STICKERS ADDED |

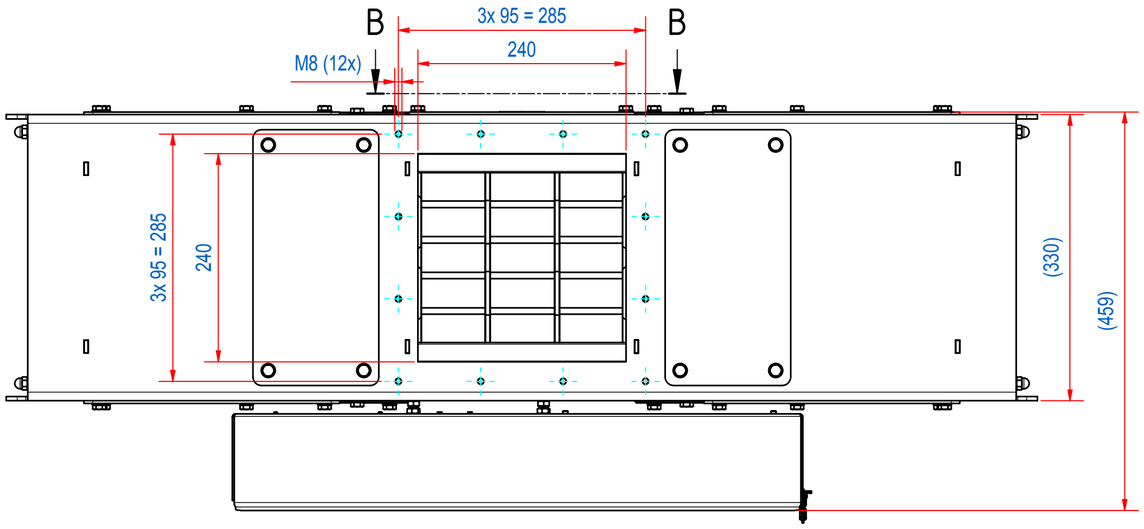


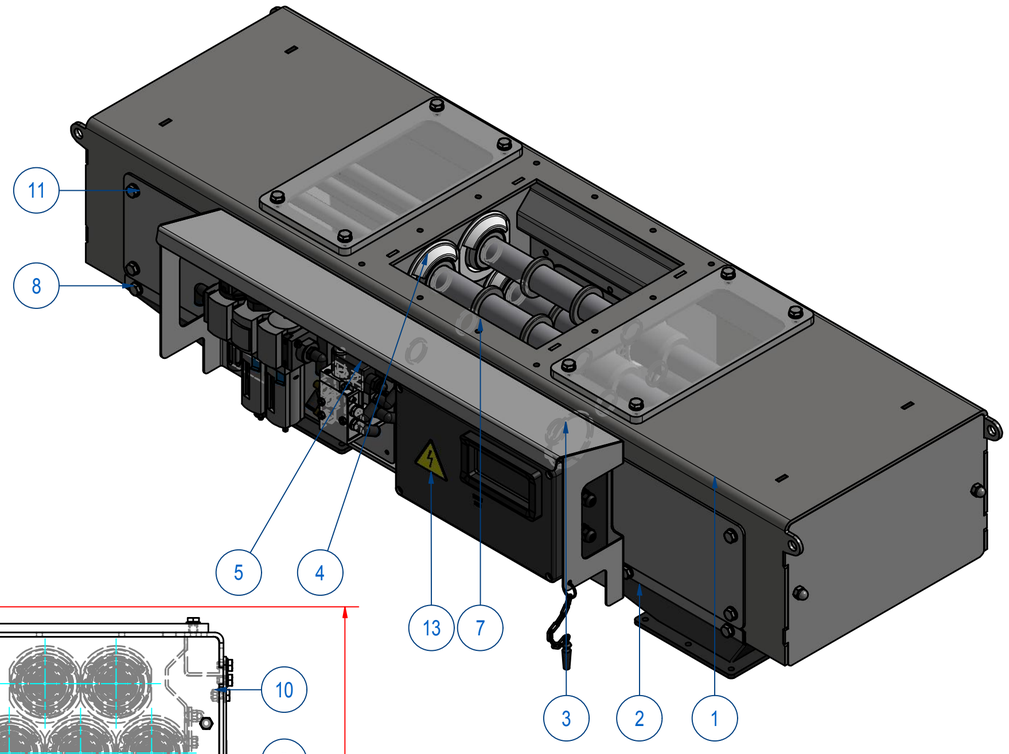


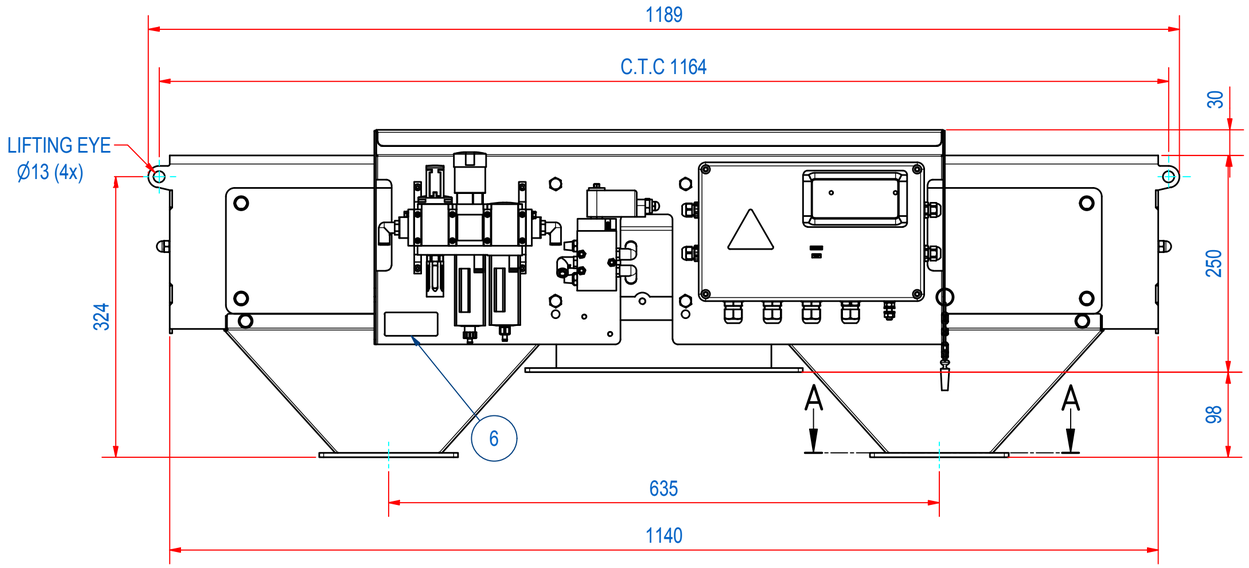


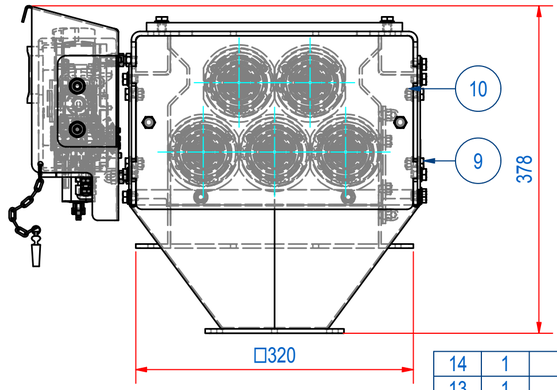


B

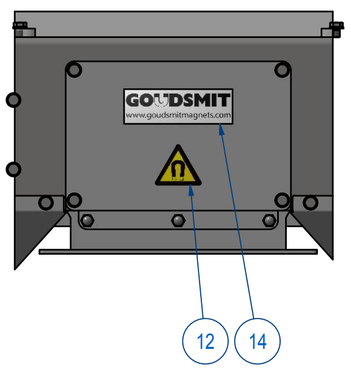


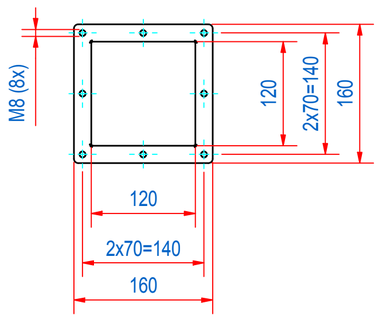


THIS DRAWING CORRESPONDS WITH
**ATEX** SCHEDULE DRAWING **M53674**

| ITEM | QTY | PART NUMBER | DESCRIPTION | Dimensions |
|---|---|---|---|---|
| 14 | 1 | 1215.00407 | NAME PLATE GOUDSMIT 125x40 | |
| 13 | 1 | 1000.20058 | STICKER DANGER ELECTRIC SHOCK | |
| 12 | 1 | 1000.20030 | STICKER MAGNETIC FIELD small | |
| 11 | 60 | 70.0200008 | WASHER M 8- A2 | M 8 |
| 10 | 8 | 60.0200008 | NUT, HEX M8 - A2 | M8 |
| 9 | 8 | 50.1208016 | BOLT, HEX M8x16 - A2 | M8x16 |
| 8 | 44 | 50.1208012 | BOLT, HEX M8x12 - A2 | M8x12 |
| 7 | 5 | SECC240916 | CC240 MAGNET ROD D34 NdFeB | |
| 6 | 1 | E0006894 | TYPE PLATE SECC ATEX 1/2D T130 | |
| 5 | 1 | A140022 | SECC CONTROL UNIT EX II 2D | |
| 4 | 10 | A120689 | CC000 SLIDE RING EC1935 | |
| 3 | 10 | A120673 | RETAINING RING D65 CC000 | |
| 2 | 2 | A240496 | CHUTE CC2424 | |
| 1 | 1 | A240494 | CLEANFLOW CC2424 | |

| RAW MAT. | Quantity | Material Number | Material Description | Length (mm) | Width (mm) |
|---|---|---|---|---|---|
| | 1 | | | | |


NEXT STEP automation
(주)넥스텝
Tel. 053-604-3040 Fax. 053-604-3042
Web. nstep.co.kr Mob. 010-4488-3040


| | | | |
|---|---|---|---|
| Sheet: A2 | Extra info: | General tolerance: | ISO 2768- mK |
| Drawn: AvD | Weight (kg): 108,3 | Drawn according: | ISO268; ISO1101; ISO2553 |
| Date: 22-7-2013 | GOUDSMIT MAGNETIC SYSTEMS | Status: | Standard |
| Spare part: False | Source: | Customer reference number: | |
| Quick search: CC2424 | ® All rights reserved. Reproduction is not permitted without written permission of GOUDSMIT Magnetic Systems BV | Document number: E0111486 | Doc.Rev: B |
| Description: SECC-2424-05S-N-Ex-F1E-L-B-B | | Part number: SECC240201 | Rev: B |